

1. 50A ;
Continuous 50A load.


2. ;
It has two sets of normally open and two sets of normally closed contacts.




ADC50D ADC50D Coil Parameters

			Starting Coil Resistance	Holding Coil Resistance	Coil Power Consumption
12V	70% Us	5% -40% Us	2.4 ± 10%	24 ± 10%	24W± 10%
24V	70% Us	5% -40% Us	9.6 ± 10%	96 ± 10%	24W± 10%
36V	70% Us	5% -40% Us	21.6 ± 10%	216 ± 10%	24W± 10%
48V	70% Us	5% -40% Us	38.4 ± 10%	384 ± 10%	24W± 10%
60V	70% Us	5% -40% Us	60 ± 10%	600 ± 10%	24W± 10%
72V	70% Us	5% -40% Us	86.4 ± 10%	864 ± 10%	24W± 10%

Model Coding

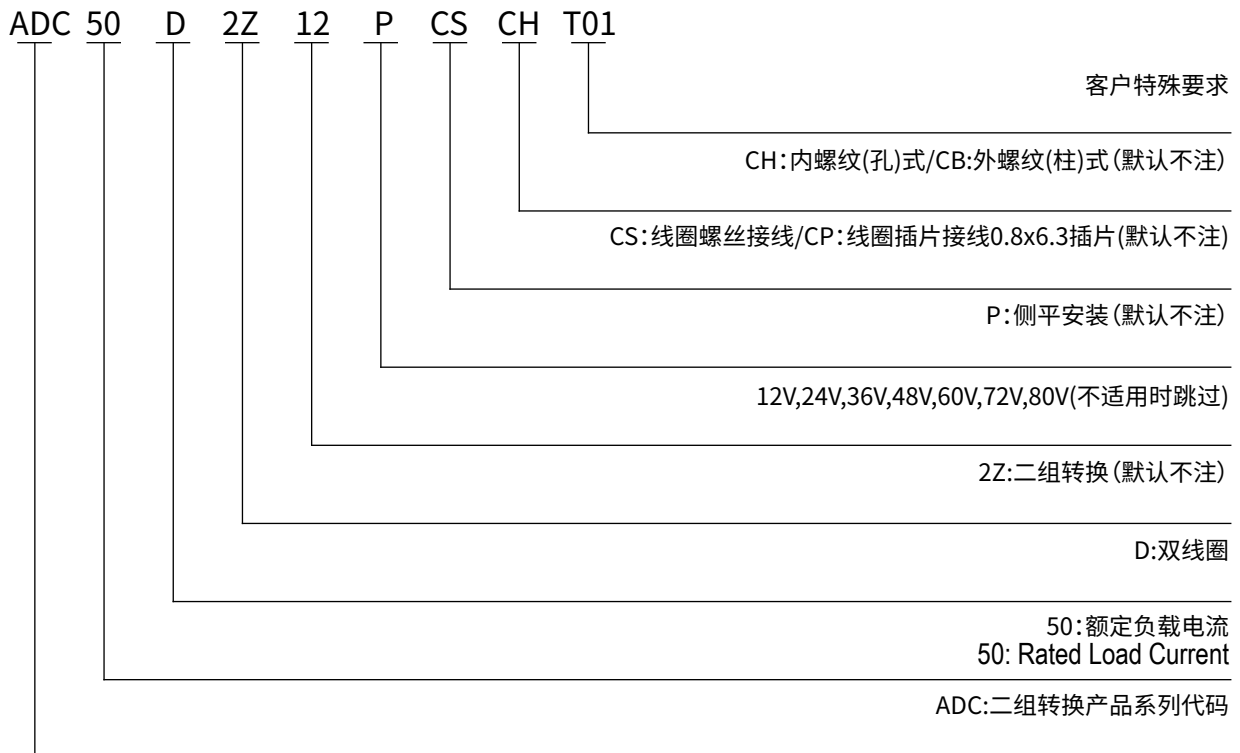


Wiring Diagram

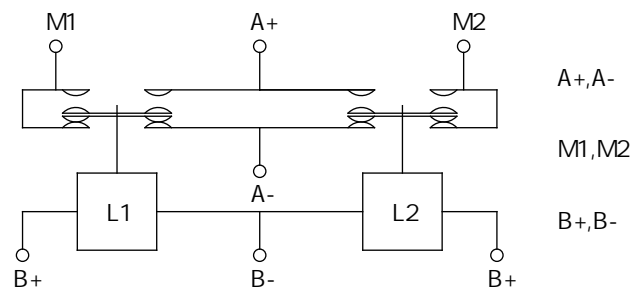

ADC50D
ADC50D Wiring Diagram

Outline Installation Dimension Drawing

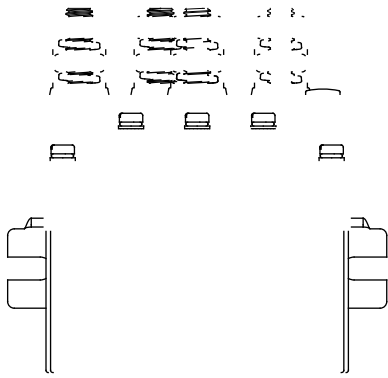

Usage Cautions

1.

2.